


OnTop Fixed flat roof window (FI) – Product Card

Standard dimensions flat roof window in PVC

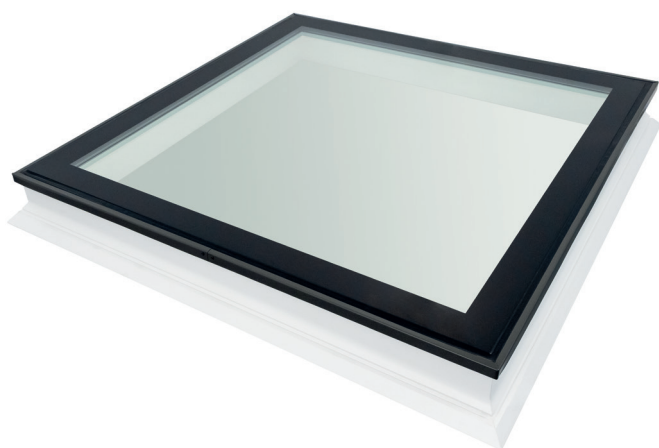

Benefits in a nutshell:

- + Ensures a secure connection with maximum pre-assembly for easy installation
- + A set of connection profiles for mechanical fixing of roof covering is included in the delivery scope to provide robust securing of the roof seal
- + Made of a weather-resistant PVC hollow chamber profile for long-lasting stability and exceptional durability
- + Features additional internal insulation for outstanding energy efficiency
- + Equipped with a toughened, fall-proof outer pane for maximum protection

Technical details

Material	PVC
Usage	From 2 – 15° roof slope
Ideal for	High and low humidity rooms
Window frame structure	Weather-resistant PVC hollow chamber profile
Profile colours	White PVC, colour similar to RAL 9016
Covering	Aluminium (Anthracite-metallic)

Technical specifications

Flat roof window	Glazing type	Thermal insulation value of the pane U_g value - W/m ² K DIN EN 673	Thermal insulation value of the window ¹ U_w value - W/m ² K DIN EN ISO 10077, DIN EN ISO 12567-2	Heat transmission coefficient ² $U_{fc,ref300}$ value W/m ² K EN 1873, $A_{fc,ref300}$ 4,67 m ²	Total energy transmittance g value in % DIN EN 410	Sound insulation class VDI guideline 2719	Air permeability class DIN EN 12207
FF2C xxx/xxx K1Fi	Double Comfort	1,0	0,99	0,78	51	3	4
FF3C xxx/xxx K1Fi	Triple Comfort	0,50	0,64	0,52	46	3	4
FF3G xxx/xxx K1Fi	Triple Premium	0,50	0,64	0,52	30	3	4


¹ U_w value calculated in vertical position according to EN 14351-1 ² $U_{fc,ref300}$ value calculated in horizontal position according to EN 1873

Dimensions

										
Flat roof window size (cm)	060/060	070/070	080/080	090/060	090/090	100/100	120/060	120/090	120/120	150/100
Roof pitch	2 – 15°									
Opening ³ in mm	600/600	700/700	800/800	900/600	900/900	1000/1000	1200/600	1200/900	1200/1200	1500/1000
External frame dimension (mm)	799/799	899/899	999/999	1099/799	1099/1099	1199/1199	1399/799	1399/1099	1399/1399	1699/1199
Internal frame dimension (mm)	524/524	624/624	724/724	824/524	824/824	924/924	1124/524	1124/824	1124/1124	1424/924
Window inner lining clearance (mm)	553/533	653/653	753/753	853/553	853/853	953/953	1153/553	1153/853	1153/1153	1453/953

³ **Planning advantage:** the existing opening can be up to + 50 mm larger to make the installation easier.

OnTop Fix Flat roof window with ASK extension kerb and AKR frame for pitched installation

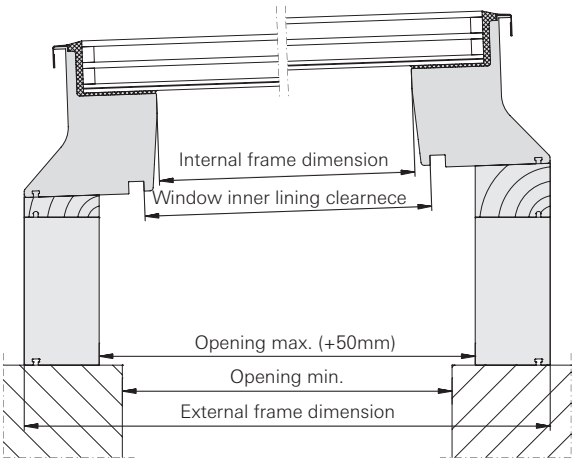

Inner lining dimensions

